


CFS-SP WB

Hilti CFS-SP WB is a firestop sealing product designed to prevent the spread of flames, smoke, and heat through penetrations in fire-rated walls and floors. It provides reliable fire resistance and easy application for a wide range of building and industrial projects.

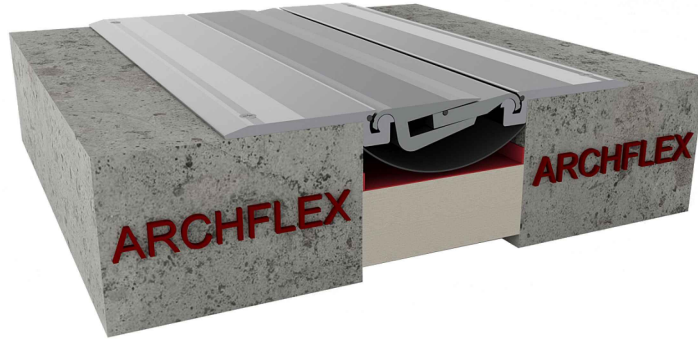

TECHNICAL DATA

- Density: approx. 1.3 g/cm³
- Color: White and red
- Chemical base: Acrylic water-based mixture
- Curing time: approx. 24 hours @ 23°C, 50% RH (for 3.2 mm thickness)
- pH value: approx. 8-9
- Movement capability: up to 50%
- Skin formation time: 2 hours (at 23°C / 50% relative humidity)


APPLICATIONS

- Wall-to-ceiling joints
- Floor joints
- Suitable for concrete, brick, and gypsum board surfaces
- Provides up to 4 hours of fire resistance in wall and floor applications
- Application temperature: +4°C to +40°C
- Service temperature: -40°C to +80°C

CFS-SP WB CONSUMPTION TABLE

(Calculated for 3 mm wet film thickness to achieve 1.5 mm dry thickness)

Joint Width (mm)	Total Coverage Width (mm)	Joint Length (m)
25	50	110
50	75	75
75	100	55
100	125	45
150	175	35
200	225	30

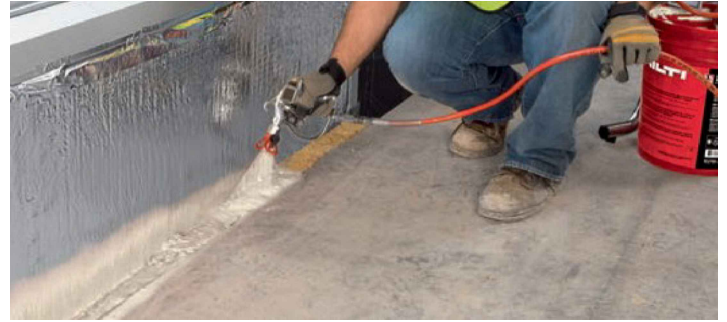

FEATURES AND BENEFITS

- Can be applied at low temperatures – best in its class
- Provides maximum flexibility, meeting 500-cycle movement test (Class II and III approval)
- Fast and easy application using pressurized spray equipment
- Saves both time and cost
- Contains no halogens, solvents, or asbestos
- Water-based formulation enables quick and easy cleaning of spray tools and equipment
- Paintable after curing
- Meets LEED™ requirements for indoor air quality
- Provides up to 4 hours of fire resistance (ASTM E1966 and UL 2079 tested)

TECHNICAL DATA

Ordering Information

Product Description	Package Content	Quantity	Item No.
Firestop joint sealant spray (White)	CFS-SP WB – Bucket (19 liters) White	1 unit	00430806
Firestop joint sealant spray (Red)	CFS-SP WB – Bucket (19 liters) Red	1 unit	00430811



ETA Onayl

