

OF-1670 SERIES

ARCH OF-1670 Series are high load bearing system ideal for vehicular traffic areas such as parking garages, warehouses and mall areas. System consists of all metal aluminium profiles. Long lasting. Minimum visible surface with no gaps. For joint gaps up to 26 mm and 16 mm total movement capacity.




ADVANTAGES

- Maintains a virtually flush finish
- Interlocking design for durability
- Different frame heights available
- Highly resistant to rolling loads, distortion and wear
- Used in areas of heavy duty loading such as forklifts and trucks with pneumatic tires
- Small gasket in interlocking assembly eliminates noise and prevents infiltration of liquids


RECOMMENDED FOR

- Interior and exterior floor expansion joint applications.
For use various construction projects, including commercial, educational, health-care and also for car parks and warehouses.
- This recessed, all-metal cover is designed for interior applications that see significant traffic, such as malls and airports. It has a unique interlocking design that allows for horizontal movement and some vertical deflection and can withstand heavy rolling loads. Different frame heights are available.


MODEL	JOINT WIDTH	HEIGHT OPTIONS	SIGHTLINE	TOTAL MOVEMENT
OF-1670-50W200	50	17 / 5.3	200	20
OF-1670-60W210	60	17 / 5.3	210	25
OF-1670-100W225	100	21 / 4	225	16
OF-1670-150W300	150	35 / 5.5	300	26
OFK-1670-50W125	50	17 / 5.3	125	20
OFK-1670-60W135	60	17 / 5.3	135	25
OFK-1670-150W225	150	35 / 5.5	225	26

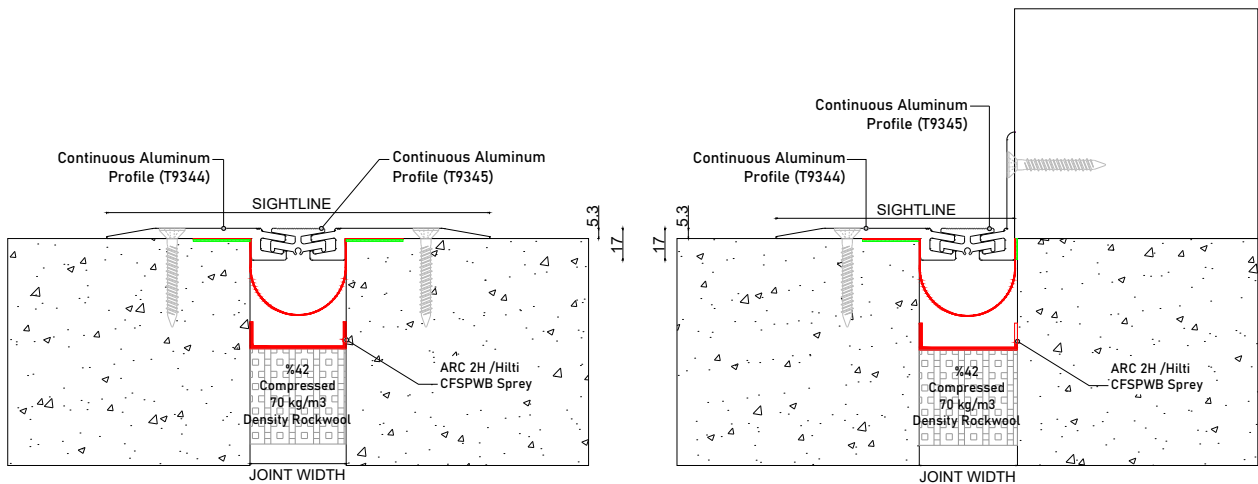


OF-1670 SERIES

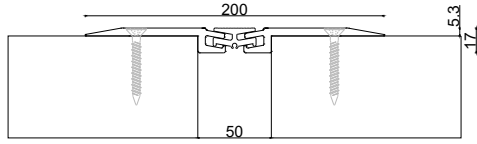


OF-1670-50W200
JW : 50 H: 17 / 5.3 S: 200 M: 20

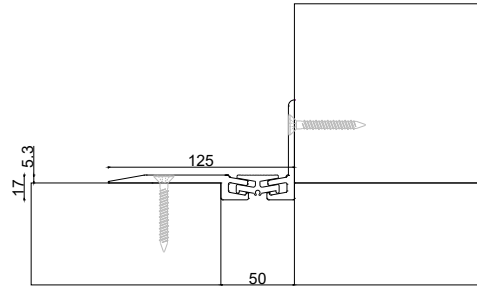


OFK-1670-50W125
JW : 50 H: 17 / 5.3 S: 125 M: 20

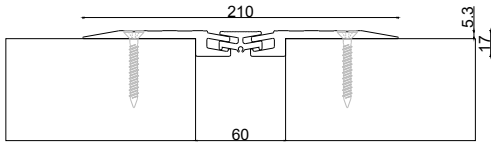


OF-1670-60W210
JW : 60 H: 17 / 5.3 S: 210 M: 25

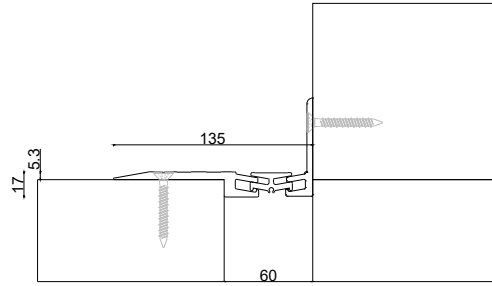


OFK-1670-60W135
JW : 60 H: 17 / 5.3 S: 135 M: 25

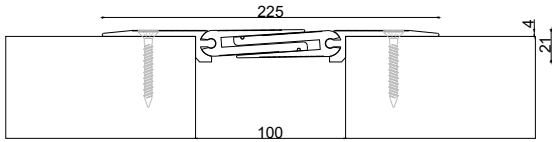

OF-1670-100W225
JW : 100 H: 21 / 4 S: 225 M: 16

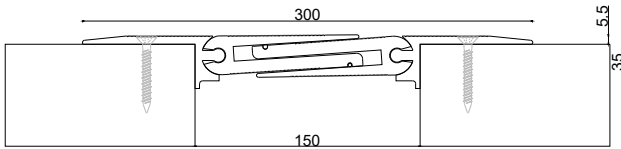

OF-1670-150W300
JW : 150 H: 35 / 5.5 S: 300 M: 26

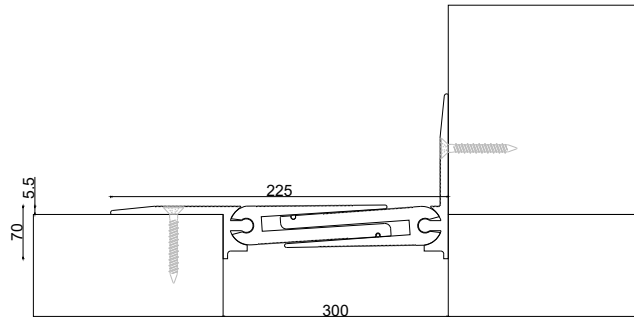

OFK-1670-150W225
JW : 150 H: 35 / 5.5 S: 225 M: 26