
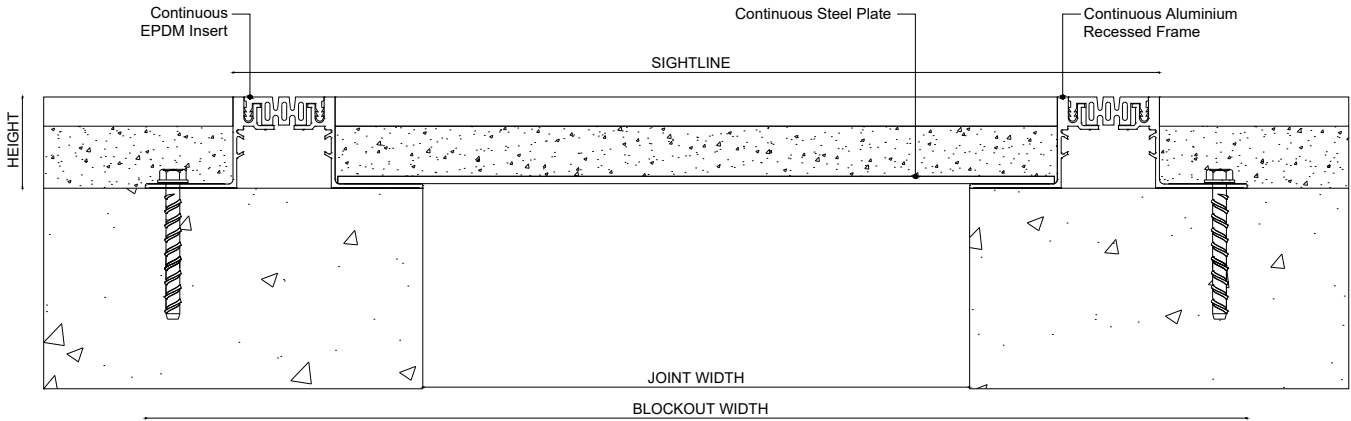


Z-5400 SERIES

- Z-5400 has dual gasket, flush floor cover is ideal for interior areas with more extensive movement requirements where a concealed cover is preferred. The cover can accept lightly wheeled equipment and is good for areas where hygiene is essential.
- Its streamlined profile maintains a clean appearance while allowing the system to function effectively under varying movement conditions. The dual-gasket structure supports consistent performance without interrupting the overall floor finish. Installation is straightforward, making it suitable for both new construction and renovation projects. The Z-5400 integrates well with a range of interior flooring materials, ensuring visual continuity across the space. Its durable components help maintain long-term reliability in environments with frequent daily use.
- Extrusion - ARCHFLEX uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221

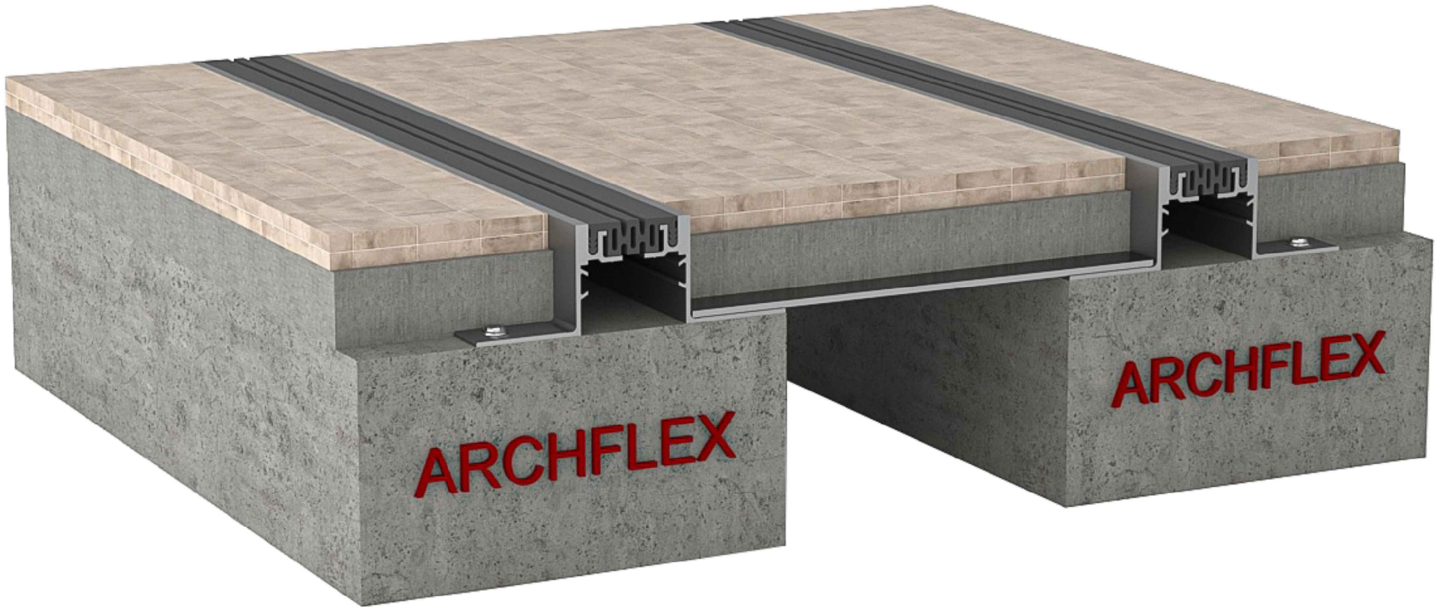

Z-5400 SERIES

MODEL	JOINT WIDTH	HEIGHT OPTIONS	SIGHTLINE	BLOCKOUT WIDTH	TOTAL MOVEMENT
Z-5400-100W308	100	20	308	400	112
Z-5400-150W358	150	20	358	450	112
Z-5400-200W408	200	20	408	500	112
Z-5400-250W458	250	20	458	550	112
Z-5400-300W508	300	20	508	600	112
Z-5400-350W558	350	20	558	650	112
Z-5400-400W608	400	20	608	700	112
Z-5400-450W658	450	20	658	750	112
Z-5400-500W707	500	20	707	800	112



Z-5400 H: 20

MODEL	JOINT WIDTH	HEIGHT OPTIONS	SIGHTLINE	BLOCKOUT WIDTH	TOTAL MOVEMENT
Z-5400-100W309	100	35	309	400	112
Z-5400-150W359	150	35	359	450	112
Z-5400-200W409	200	35	409	500	112
Z-5400-250W459	250	35	459	550	112
Z-5400-300W509	300	35	509	600	112
Z-5400-350W559	350	35	559	650	112
Z-5400-400W609	400	35	609	700	112
Z-5400-450W659	450	35	659	750	112
Z-5400-500W709	500	35	709	800	112




Z-5400 H: 35

MODEL	JOINT WIDTH	HEIGHT OPTIONS	SIGHTLINE	BLOCKOUT WIDTH	TOTAL MOVEMENT
Z-5400-100W308	100	50	308	400	112
Z-5400-150W358	150	50	358	450	112
Z-5400-200W408	200	50	408	500	112
Z-5400-250W458	250	50	458	550	112
Z-5400-300W508	300	50	508	600	112
Z-5400-350W558	350	50	558	650	112
Z-5400-400W608	400	50	608	700	112
Z-5400-450W658	450	50	658	750	112
Z-5400-500W708	500	50	708	800	112




Z-5400 H: 50

MODEL	JOINT WIDTH	HEIGHT OPTIONS	SIGHTLINE	BLOCKOUT WIDTH	TOTAL MOVEMENT
Z-5400-100W316	100	60	316	420	112
Z-5400-150W366	150	60	366	470	112
Z-5400-200W416	200	60	416	520	112
Z-5400-250W466	250	60	466	570	112
Z-5400-300W516	300	60	516	620	112
Z-5400-350W566	350	60	566	670	112
Z-5400-400W616	400	60	616	720	112
Z-5400-450W666	450	60	666	770	112
Z-5400-500W716	500	60	716	820	112

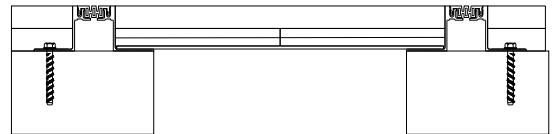

Z-5400 H: 60

MODEL	JOINT WIDTH	HEIGHT OPTIONS	SIGHTLINE	BLOCKOUT WIDTH	TOTAL MOVEMENT
Z-5400-100W315	100	90	315	415	112
Z-5400-150W366	150	90	366	465	112
Z-5400-200W416	200	90	416	515	112
Z-5400-250W466	250	90	466	565	112
Z-5400-300W516	300	90	516	615	112
Z-5400-350W566	350	90	566	665	112
Z-5400-400W616	400	90	616	715	112
Z-5400-450W666	450	90	666	765	112
Z-5400-500W716	500	90	716	815	112

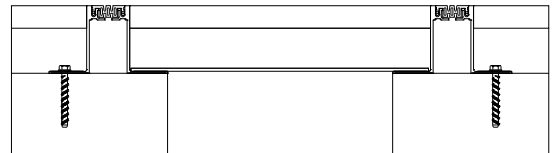

Z-5400 H: 90