



Z-5000 W SERIES

- Z-5000 W floor expansion joint system is pan system designed for generous thermal and seismic movement requirements and narrow sight lines that minimize aesthetic disruption to flooring finishes.
- Extrusion – ARCHFLEX uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts. Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221.

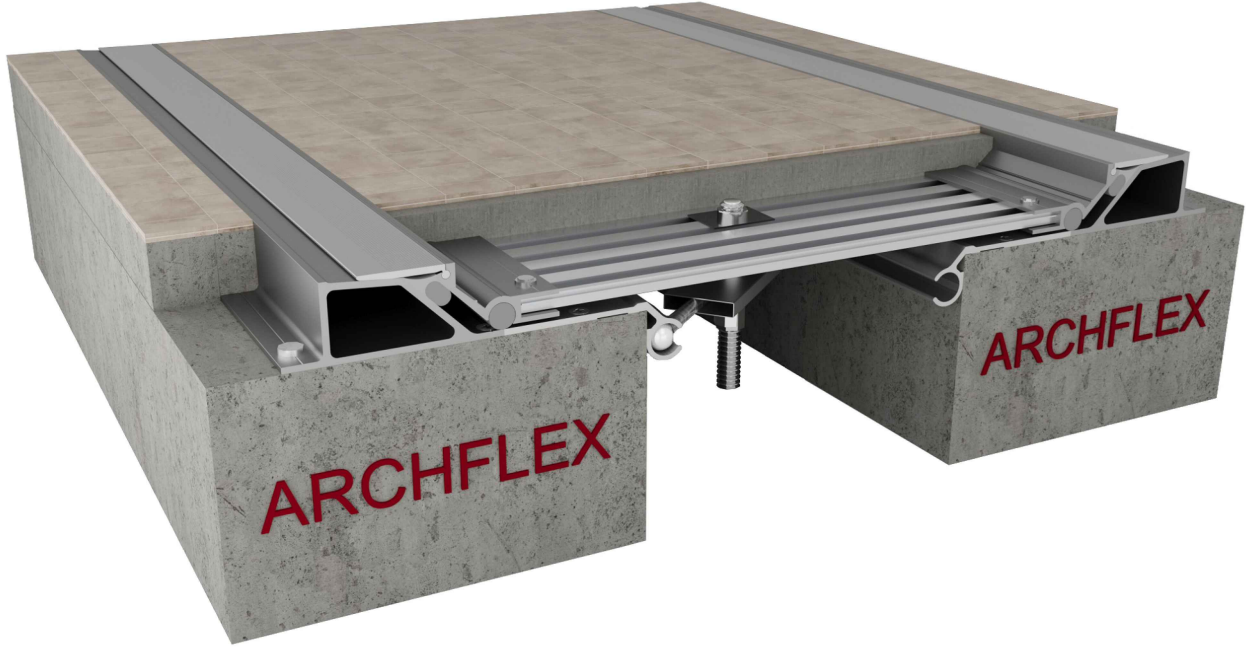


Its recessed configuration provides a smooth transition between floor finishes while still allowing the system to perform under significant building movement. The Z-5000 W maintains structural stability without drawing visual attention, making it suitable for modern interior spaces. Installation is straightforward and accommodates a variety of construction conditions. The system's durable components support long-term reliability, even in areas with frequent foot traffic or occasional rolling loads. Overall, it offers a practical balance between performance needs and clean architectural detailing.


MODEL	JOINT WIDTH	HEIGHT OPTIONS	SIGHTLINE	BLOCKOUT WIDTH	TOTAL MOVEMENT
Z-5000 W-200W692	200	60	692	750	400
Z-5000 W-250W742	250	60	742	800	450
Z-5000 W-300W792	300	60	792	850	500
Z-5000 W-400W956	400	60	956	1014	668
Z-5000 W-500W1122	500	60	1180	1122	832
Z-5000 W-750W1362	750	60	1362	1420	1001

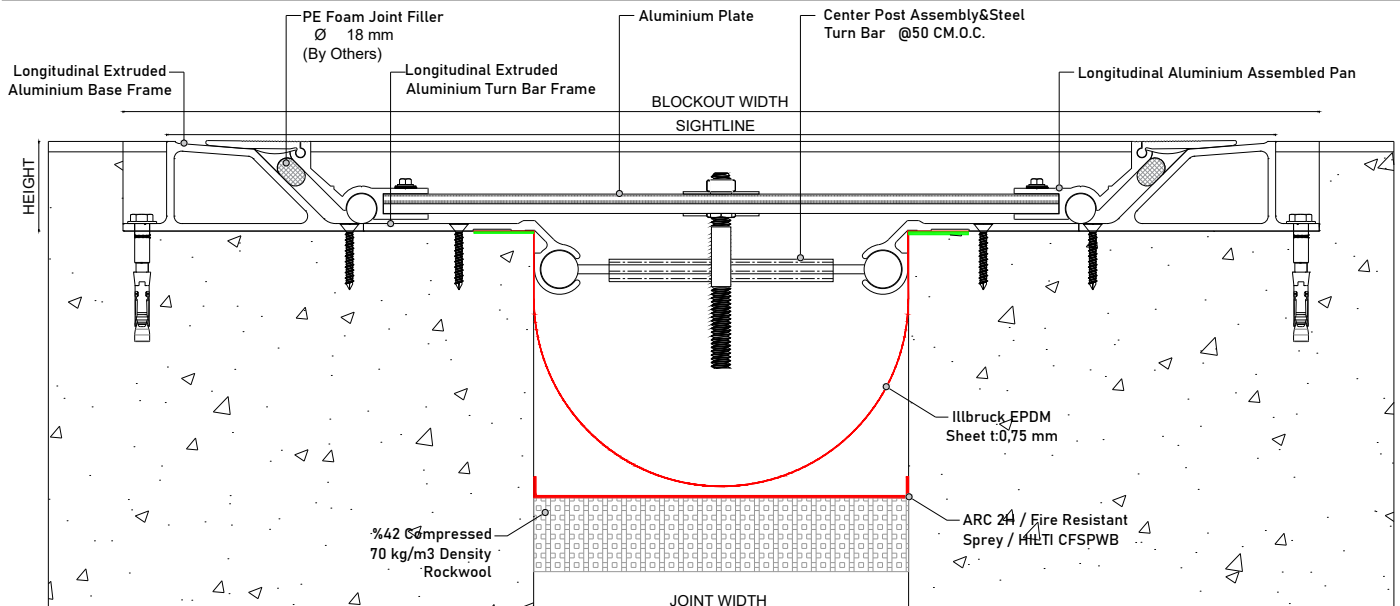


Z-5000 W SERIES

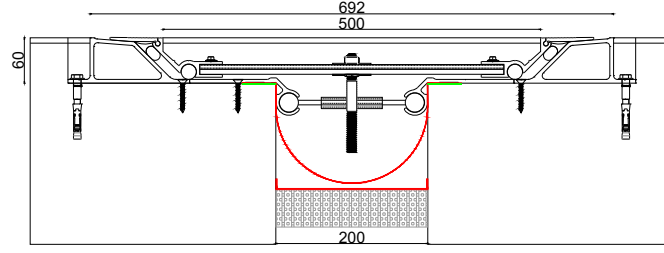


■ Z-5000 W-200W692
JW : 200 H: 60 S: 692 BW: 750 M: 400

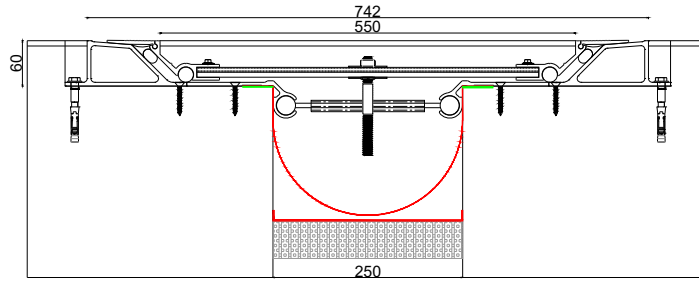

■ Z-5000 W-250W742
JW : 250 H: 60 S: 742 BW: 800 M: 450

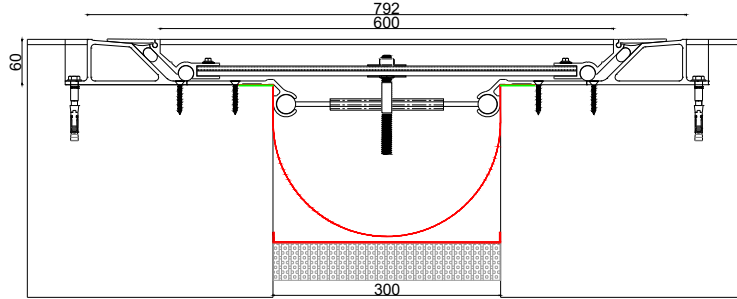


■ Z-5000 W-300W792
JW : 300 H: 60 S: 792 BW: 850 M: 500

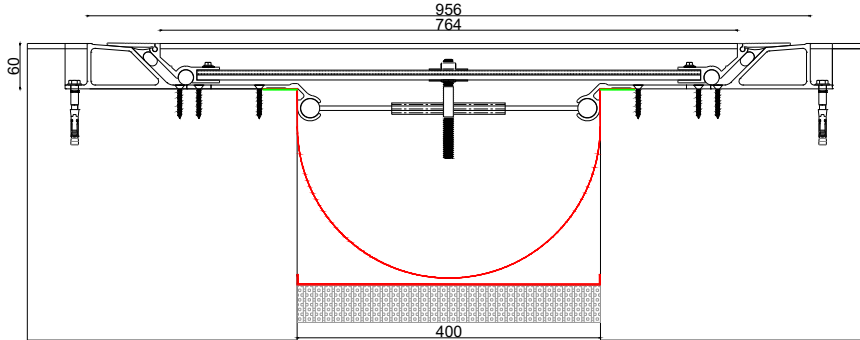


■ Z-5000 W-400W956
JW : 400 H: 60 S: 956 BW: 1014 M: 668

Z-5000 W SERIES

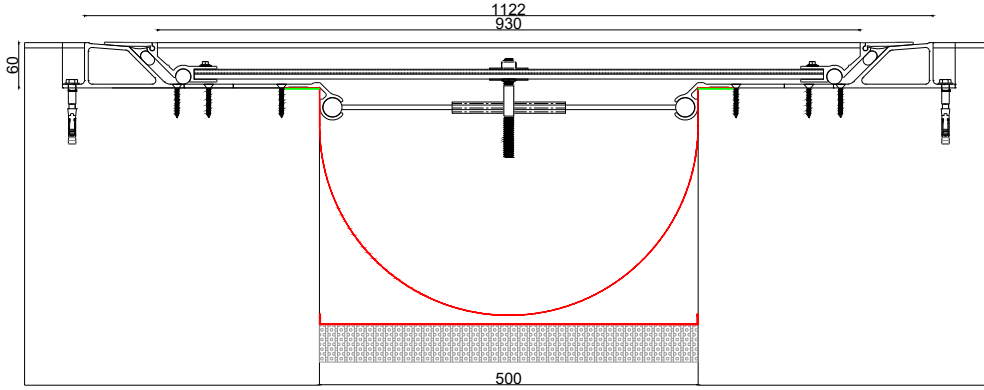

■ Z-5000 W-500W1122
JW : 500 H: 60 S: 1122 BW: 1180 M: 832

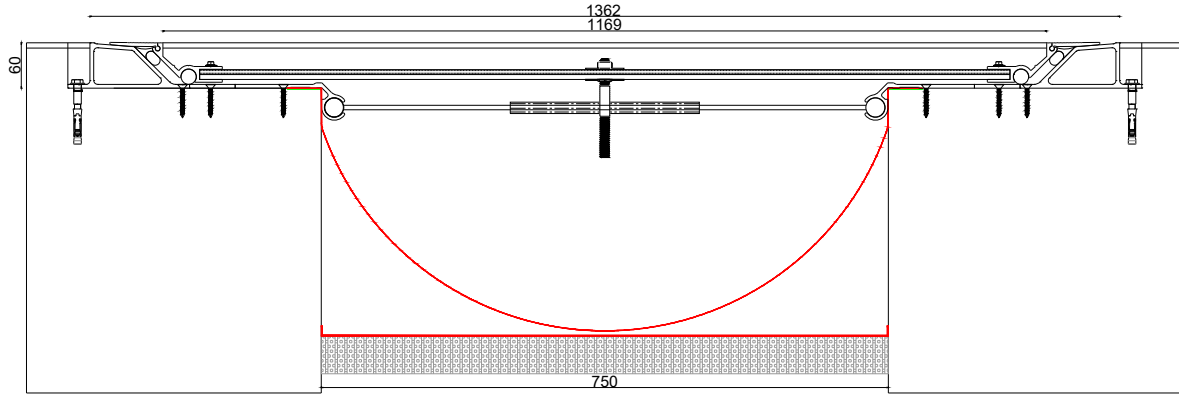

■ Z-5000 W-750W1362
JW : 750 H: 60 S: 1362 BW: 1420 M: 1001