



Z-1000 SERIES

■ This flush, gasketed floor cover is ideal for interior applications where minimal visual impact is desired and where hygiene is important. This cover is available in multiple frame heights to accommodate most floor finishes.



■ TECHNICAL DATA

ALUMINUM

• Extrusion - ARCHFLEX uses multiple alloys & tempers which are established to be the most appropriate for the given use of individual parts.

Will be one of the following: (6063-T5, T6, T52) (6061-T5, T6, T51) (6105-T5, T6) (6005-T5) (6005A-T5, T61), ASTM B221

PRIMARY SEAL

• Dual Durometer 65 Shore A, 90 Shore A, ASTM D2240

STANDARD LOADING


• 225 kg

MODEL	JOINT WIDTH	HEIGHT OPTIONS	SIGHTLINE	BLOCKOUT WIDTH	TOTAL MOVEMENT
Z-1000-30W26 H12	30	12	26	106	6
Z-1000-30W27 H37.5	30	37.5	27	132	6
Z-1000-30W27 H50	30	50	27	132	6
Z-1000-50W49 H37.5	50	37.5	49	154	12
Z-1000-50W49 H50	50	50	49	158	12
Z-1000-75W83 H37.5	75	37.5	83	208	20
ZK-1000-30W26.5 H12	30	12	26.5	67	6
ZK-1000-30W27 H37.5	30	37.5	27	79	6
ZK-1000-30W27 H50	30	50	27	79	6
ZK-1000-50W49 H37.5	50	37.5	49	101	12
ZK-1000-50W49 H50	50	50	49	104	12
ZK-1000-75W83 H37.5	75	37.5	83	145	20

■ ADVANTAGES

The Z-1000 is a discreet floor cover solution that blends smoothly into interior spaces, maintaining a clean and refined look. Designed for versatility, it adapts to different finishes while supporting both hygiene and visual simplicity. With its understated design, the Z-1000 enhances the space without drawing attention to itself.


- Minimal Sightline
- Minimal Bump
- Hygienic
- Low Maintenance
- Suitable For Most Floor Finishes

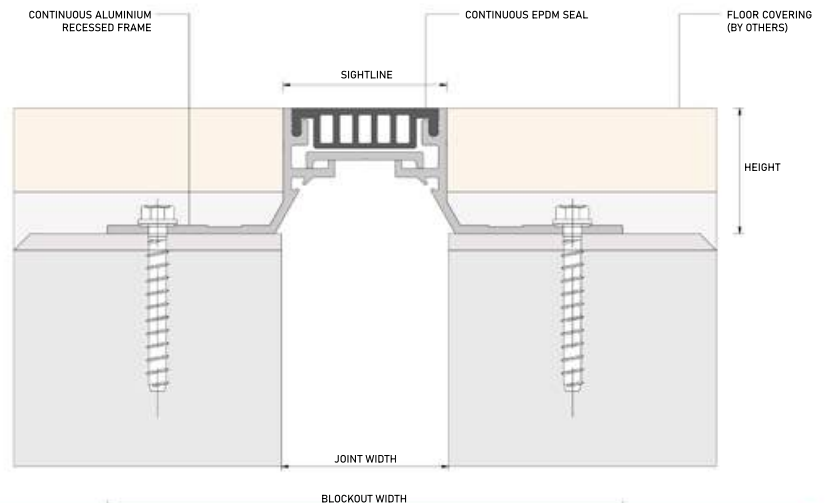




Z-1000 SERIES


■ Z-1000-30W26 H12
JW : 30 H:12 S:26 BW: 106 M:6




■ ZK-1000-30W26.5 H12
JW : 30 H:12 S:26.5 BW: 67 M:6




■ Z-1000-30W27 H37.5
JW : 30 H:37.5 S:27 BW: 132 M:6




■ ZK-1000-30W27 H37.5
JW : 30 H:37.5 S:27 BW: 79 M:6




■ Z-1000-30W27 H50
JW : 30 H:50 S:27 BW: 132 M:6




■ ZK-1000-30W27 H50
JW : 30 H:50 S:27 BW: 101 M:6




■ Z-1000-50W49 H37.5
JW : 50 H:37.5 S:49 BW: 154 M:12




■ ZK-1000-50W49 H37.5
JW : 50 H:37.5 S:49 BW: 101 M:12




■ Z-1000-50W49 H50
JW : 50 H:50 S:49 BW: 158 M:12



■ ZK-1000-50W49 H50
JW : 50 H:50 S:49 BW: 104 M:12



■ Z-1000-75W83 H37.5
JW : 75 H:37.5 S:83 BW:208 M:20

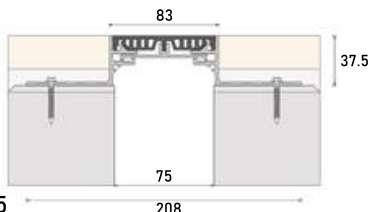

■ ZK-1000-75W83 H37.5
JW : 75 H:37.5 S:83 BW: 145 M:20

