


ARCH FB SERIES

This parking cover has an EPDM seal that allows for movement, while the integral nosing eliminates the need for elastomeric concrete. During installation, the cover is bonded into a high-strength epoxy bedding and is sealed on each side with a urethane sealant, resulting in a durable and watertight system.

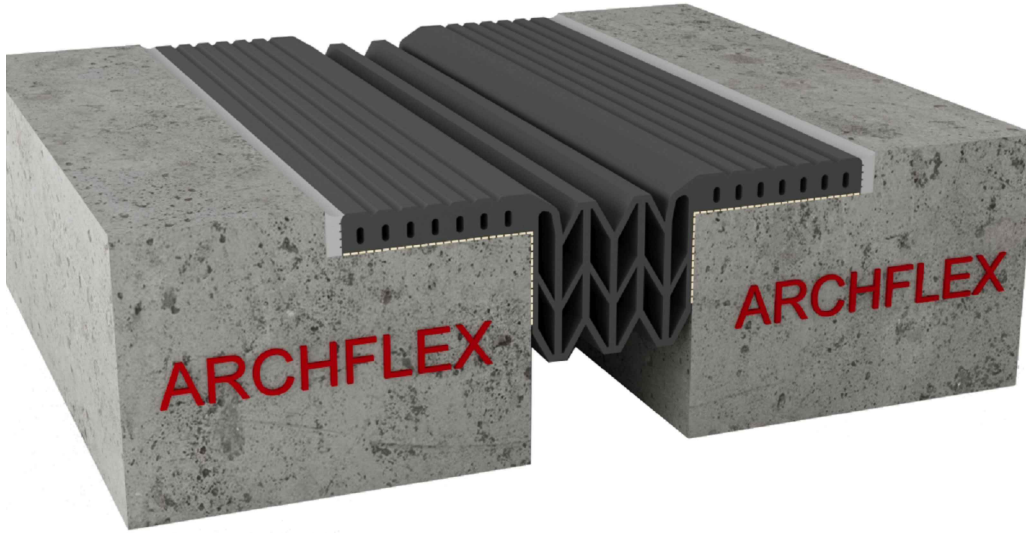



ADVANTAGES

- Great for parking structures and stadium applications
- Eliminates the need for messy elastomeric concrete
- One-piece design for fast and simple installation
- Splice kits available for field splicing of material
- No mechanical fasteners
- Durable, watertight system


PRODUCT DETAILS

- Joint sizes range from 25mm to 100mm
- Available in five standard rool sizes: 6m, 9m, 20m, 40m and 60m
- 1,500 kg concentrated load per IBC2009 1607.1
- Meets ASTM E1399


MODEL	JOINT WIDTH	HEIGHT OPTIONS	SIGHTLINE	TOTAL MOVEMENT
FB-25	25	52	200	13
FB-50	50	53	230	38
FB-75	75	77	250	52
FB-100	100	77	275	70
FBK-25	25	52	117	13
FBK-50	50	53	139	38
FBK-75	75	77	164	52
FBK-100	100	77	189	70

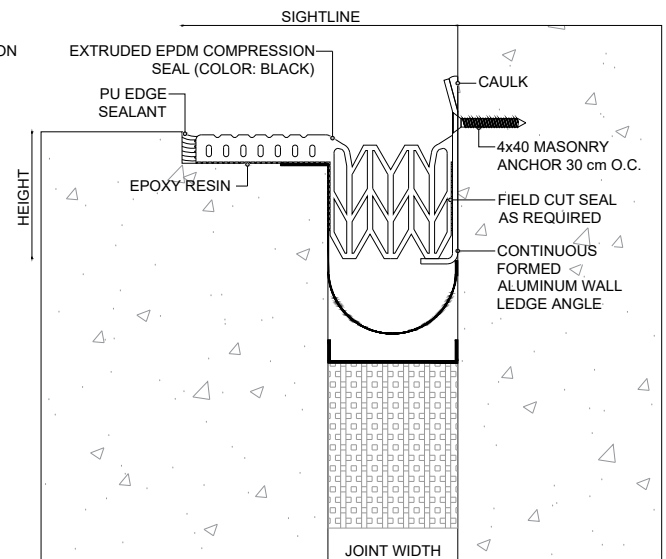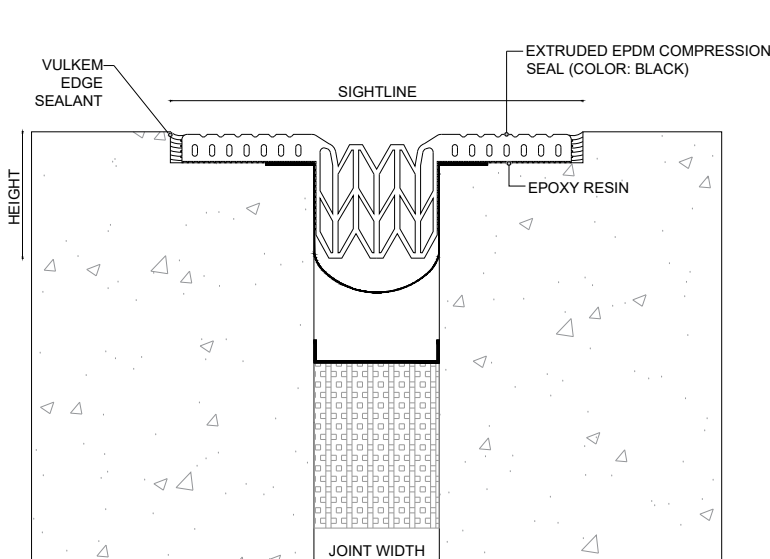


ARCH FB SERIES

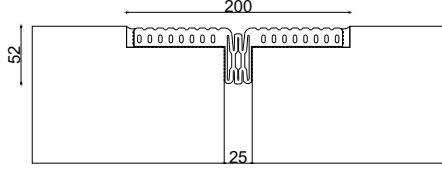


■ FB-25
JW :25 H:52 S:200 M:13

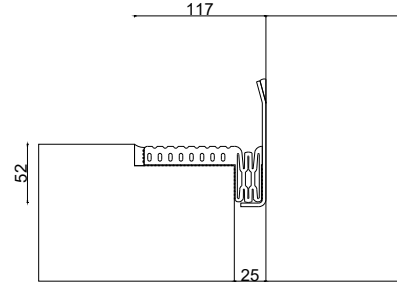


■ FBK-25
JW :25 H: 52 S:117 M:13

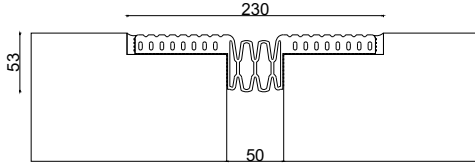


■ FB-50
JW :50 H:53 S:230 M:38

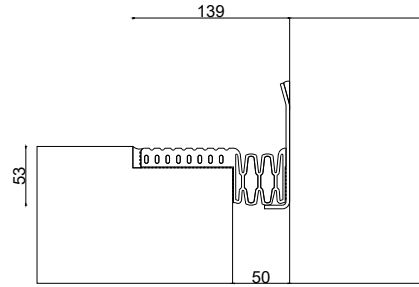


■ FBK-50
JW :50 H:53 S:139 M:38

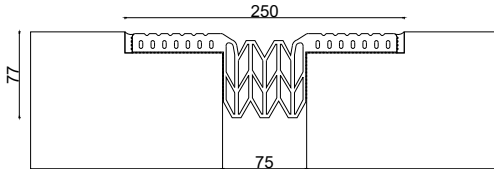


■ FB-75
JW :75 H:77 S:250 M:52

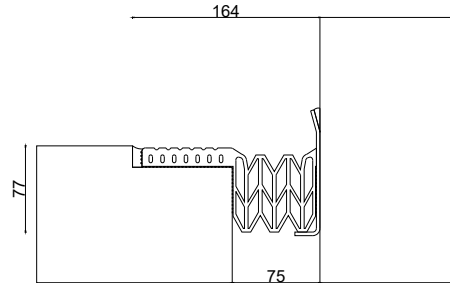

■ FBK-75
JW :75 H:77 S:164 M:52

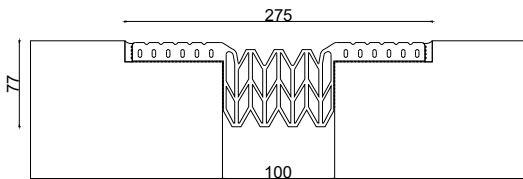

■ FB-100
JW :100 H:77 S:275 M:70

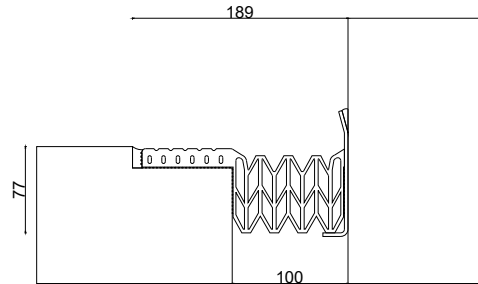

■ FBK-100
JW :100 H:77 S:189 M:70