


Z-6000 SERIES

Z-6000 recessed metal floor cover is designed for interior and exterior applications where low maintenance and heavy-duty rolling loads are expected. The free-floating aluminum center plate spans the joint and slides between frame assemblies to allow movement when required.


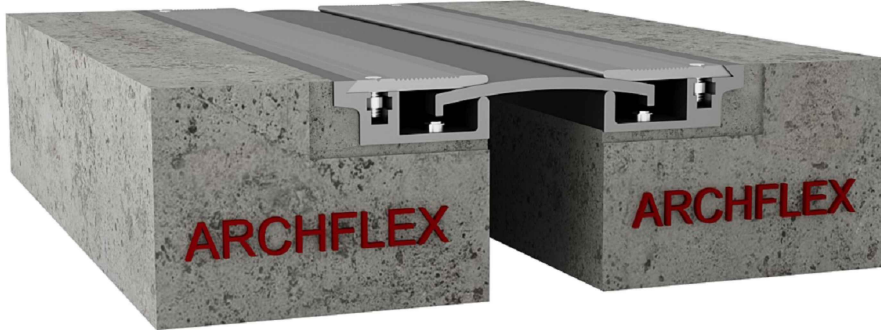


ADVANTAGES


- Heavy-duty loading
- Ideal for high-traffic areas
- Low maintenance
- Tamper-resistant
- Suitable for most floor finishes

This system ensures reliable performance in high-traffic environments, making it suitable for commercial, institutional, and transportation facilities. Its recessed design allows for a smooth transition between floor finishes, reducing trip hazards and preserving a clean architectural line. The Z-6000 also supports consistent movement absorption without compromising structural stability. Its durable construction resists wear caused by repeated rolling loads and long-term use. Additionally, the profile integrates easily with various flooring materials, offering flexibility during installation and finish coordination.


MODEL	JOINT WIDTH	HEIGHT OPTIONS	SIGHTLINE	TOTAL MOVEMENT
Z-6000-30W157	30	25	157	60
Z-6000-50W177	50	25	177	60
Z-6000-75W202	75	25	202	60
Z-6000-100W227	100	25	227	60
Z-6000-100W245	100	25	245	80
Z-6000-100W248	100	30	248	80
Z-6000-150W295	150	25	295	80
Z-6000-180W328	180	30	328	80
ZK-6000-30W93	30	25	93	30
ZK-6000-50W114	50	25	114	30
ZK-6000-100W164	100	25	164	30
ZK-6000-100W173	100	25	173	40
ZK-6000-100W174	100	30	174	40

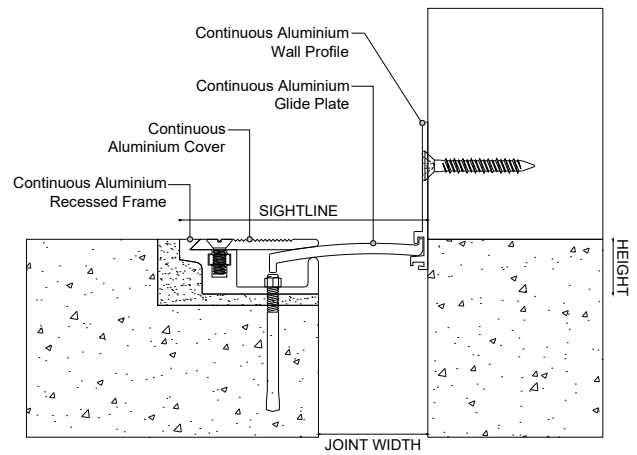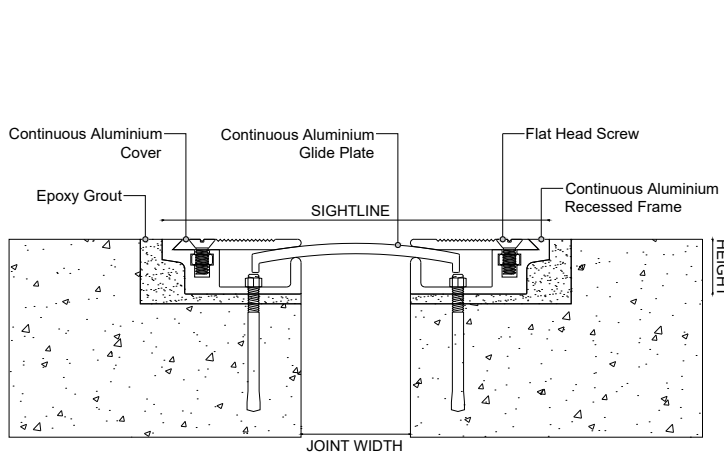


Z-6000 SERIES

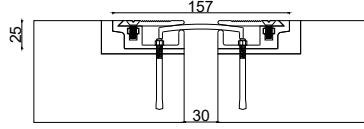


■ Z-6000-30W157
JW : 30 H: 25 S: 157 M: 60

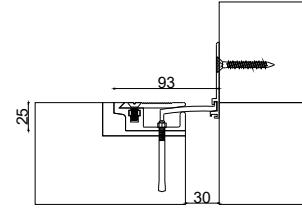


■ ZK-6000-30W93
JW : 30 H: 25 S: 93 M: 30

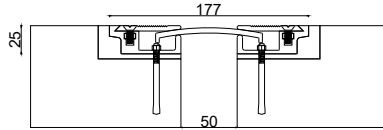


■ Z-6000-50W177
JW : 50 H: 25 S: 177 M: 60




■ ZK-6000-50W114
JW : 50 H: 25 S: 114 M: 30

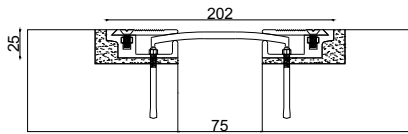

■ Z-6000-75W202
JW : 75 H: 25 S: 202 M: 60

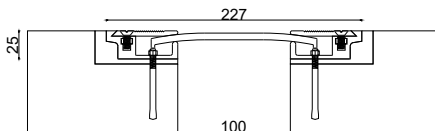


■ Z-6000-100W227
JW : 100 H: 25 S: 227 M: 60

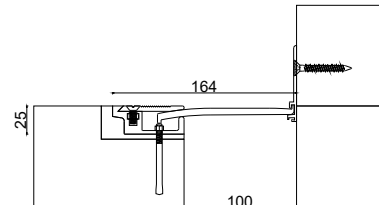


■ ZK-6000-100W164
JW : 100 H: 25 S: 164 M: 30


Z-6000 SERIES

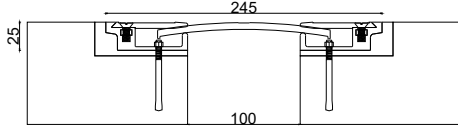


■ Z-6000-100W245
JW : 100 H: 25 S: 245 M: 80

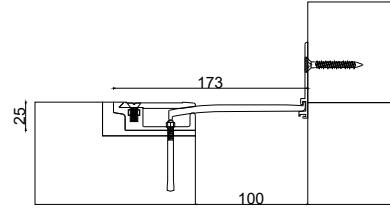


■ ZK-6000-100W173
JW : 100 H: 25 S: 173 M: 40

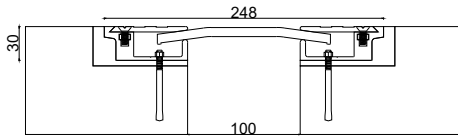


■ Z-6000-100W248
JW : 100 H: 30 S: 248 M: 80

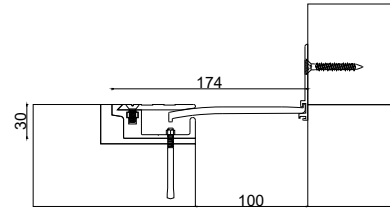

■ ZK-6000-100W174
JW : 100 H: 30 S: 174 M: 40

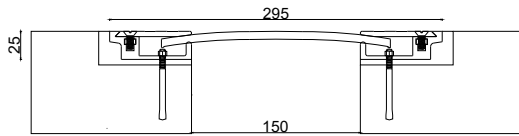

■ Z-6000-150W295
JW : 150 H: 25 S: 295 M: 80

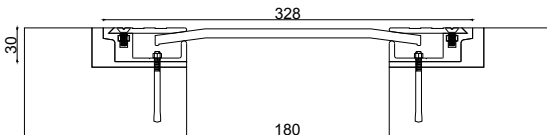

■ Z-6000-180W328
JW : 180 H: 30 S: 328 M: 80